

KNOWLEDGESCAPE
- part of FLSmidth

LoadIQ

Mill Scanning Technology



Optimise mill loading with smart sensor technology

When you're working with raw materials, inconsistency is to be expected. The ore body changes. Liners wear. And before you know it, you're losing efficiency in your mill. Optimal mill loading ensures you're making the most of all that grinding energy to achieve the best possible results for the lowest possible cost.

What you need is state-of-the-art sensing technology that detects all these changing conditions in real time and enables you to adjust your operating parameters accordingly. Enter LoadIQ, the smart load optimization tool for SAG and AG mills that enables you to increase throughput by 3 – 6%.

Key benefits

■
Load
optimization

■
Real-time
feedback

■
Increased
throughput

■
Reduced mill
liner wear

Increase mill throughput without upgrading your grinding mill

You don't need to upgrade your mill to increase throughput – you just need to make the most of the capacity you already have. Our mill scanner technology monitors how full a mill is, where the charge is located, and where the cascading material is impacting the liner. Our LoadIQ software determines how the load should be adjusted in real-time even as ore size and hardness, and liners wear to maximize efficiency.

Take the guesswork out of setting bearing pressure and load targets

Earlier tools aimed at optimising mill load were not always successful. They were judging volumetric load – how full the mill is – by bearing pressure, a flawed measurement.

Bearing pressure doesn't account for ore size changes (interstitial spacing affecting density), and this measurement is also confused by changes in oil temperature, mill direction, liner wear, and mill density.

LoadIQ utilises cutting edge mill scanner smart sensor technologies to bridge these gaps and accurately measure volumetric filling and ore trajectory in real time. We then use large scale data analysis and real time smart sensor data to correlate maximum breakage rates to the incoming ore types as well as the current liner profile.

These correlations are used to establish automatic real-time dynamic load optimization for any control system.


Optimise efficiency, instantly

Historically, the road to steady grinding can be a long one, based on operator trial and error. And every time the ore changes, or the liners wear, or are replaced, the whole process must begin again. This not only means long delays between finding the ideal load targets – all the while losing efficiency – it also means swings between overloaded and underloaded conditions, which are damaging to both production and mill liners.

With LoadIQ, there is no long wait for feedback. LoadIQ will update bearing pressure / RPM limits and targets in real-time to adjust for changing conditions and maintain maximum grinding efficiency. These updated limits can be sent to operators for manual control, or they can be fed into any expert system for real time optimization using OPC communication.


Reduce liner wear

Liner wear is directly correlated to the ore trajectory in a grinding mill for a given RPM. As the liners wear, the ability to strike the toe at higher volumetric fills may not be possible. In cases where this is true, the volumetric load will automatically be decreased until the toe is impacted, thus restoring maximum efficiency. Conversely, with a new set of liners, the trajectory at high RPM will likely cause excessive liner strikes. In these cases, LoadIQ automatically reduces the maximum allowable RPM such that the cascading ore is impacting the charge toe.

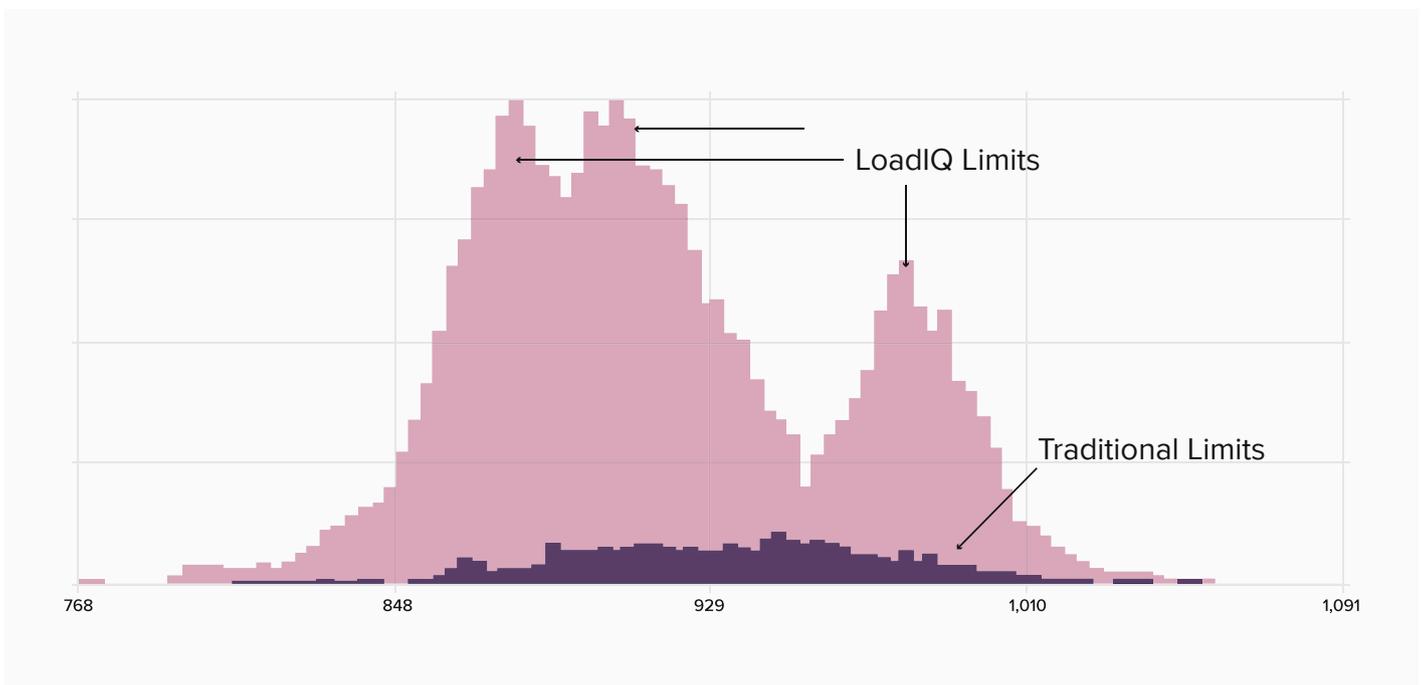

How does LoadIQ help you achieve optimal mill load?

LoadIQ is made up of smart sensors (i.e. the mill scanner technology) and AI-based software (i.e. an intelligent web-based application that integrates with your expert system and operators).

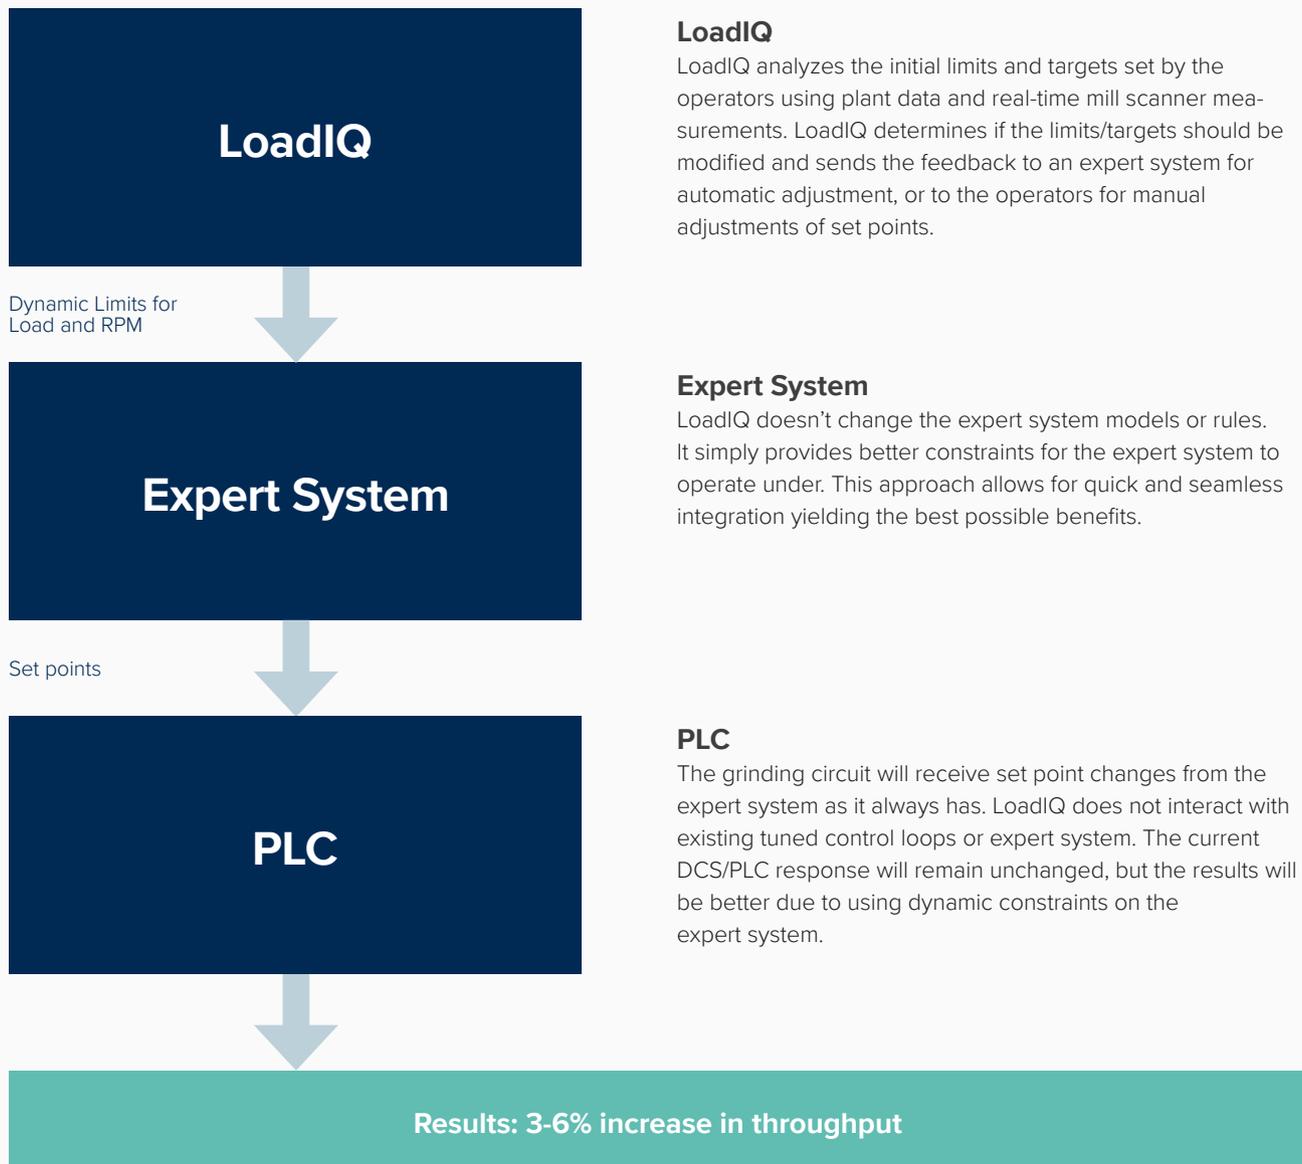

Smart solutions

The strength of this solution lies in the state-of-the-art hardware and software we apply.


Hardware

The mill scanner technology will accurately measure volumetric fill, location of charge toe, and the location and intensity of liner impacts.

- Transmits wirelessly and installs in less than a day
- Requires no batteries or charging (self-generating power)
- Does not rely on a static position sensor or proximity sensor
- Can detect a broken liner bolt for added safety
- Has backup circuitry to ensure full functionality when primary circuits fail. Alerts can be sent to the DCS to schedule repair during next down day for seamless operation.

Software

- Accessed using a web browser eliminating the need for multiple client licenses
- Measures ball charge, volumetric fill, impact intensity & location, and charge toe position
- Can automatically determine and adjust optimal load targets and limits using OPC communication.

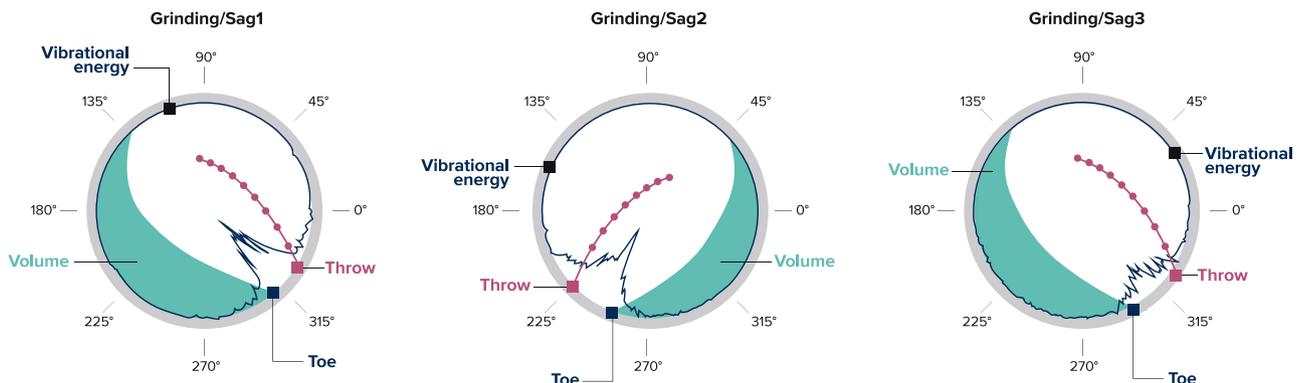

Volume	Intensity	Toe	Throw
26.9	62.7	309	329


Volume	Intensity	Toe	Throw
21.8	62.8	250	224

Volume	Intensity	Toe	Throw
23.2	59.4	296	329

Quick Results

The installation of LoadIQ will have an immediate and significant impact on your process. Typical results are extended liner life, increased throughput, and reduced power usage. The charts below demonstrate a recent example from a client in Peru. This particular client had an existing expert system, but was having difficulty achieving the target throughput and had significant variability in mill loading and feed rates. With the addition of LoadIQ power usage dropped dramatically, while throughput increased by 11%.

LoadIQ continuously reads two key data points in the mill – the toe, which indicates fill level, and the throw, which indicates liner life. It also monitors the particle size of the material entering the mill, enabling the intelligent software to calculate the optimum mill load target based on current liner and ore parameters. The aim is to maximize volume while ensuring that input energy is used efficiently to reduce particle size, giving you optimum mill performance.

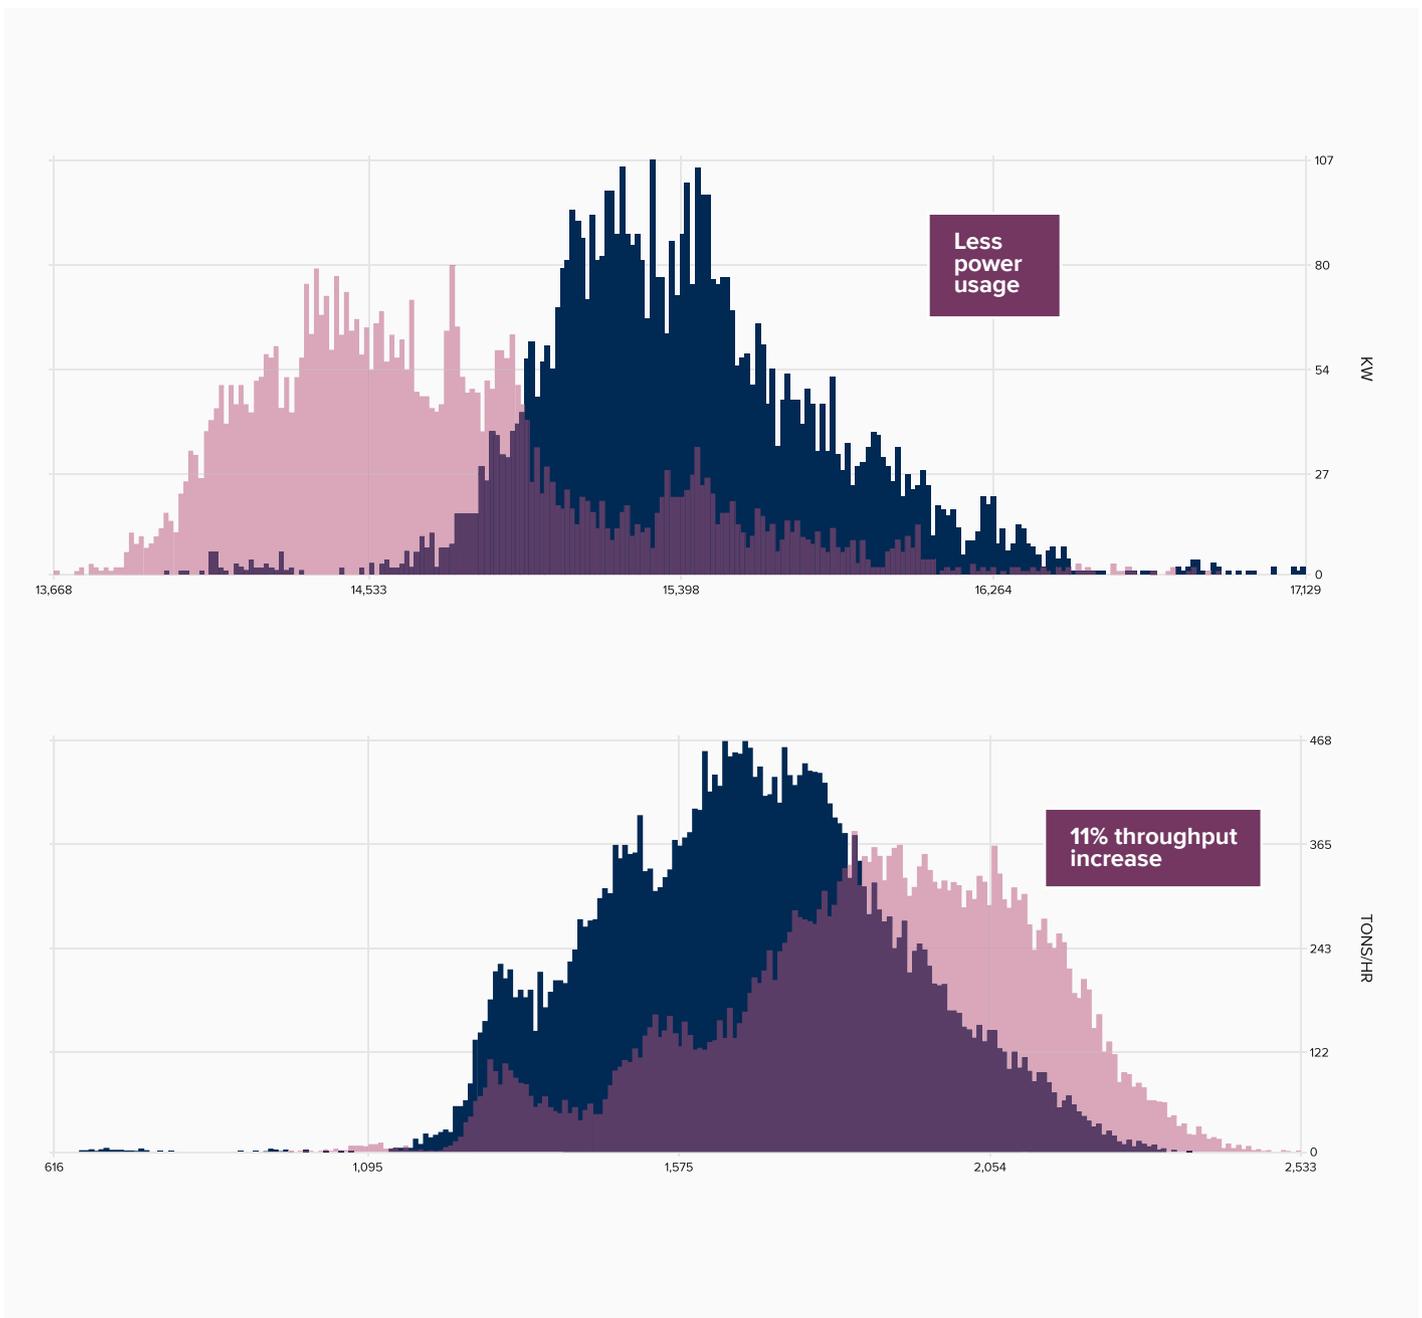



Our LoadIQ experts are ready to help you.

Contact them at:

 801-784-8161



Learn more about LoadIQ and other mill scanner smart sensor technology:

 www.flsmidth.com/Load-IQ



Towards zero emissions
in mining

FLSmith Inc

7158 S FLSmith Dr
Midvale, UT 84047
USA
Tel: +1 801 871 7000
info.sl@flsmith.com

www.flsmith.com



[flsmith.com/linkedin](https://www.flsmith.com/linkedin)



[flsmith.com/twitter](https://www.flsmith.com/twitter)



[flsmith.com/facebook](https://www.flsmith.com/facebook)



[flsmith.com/instagram](https://www.flsmith.com/instagram)



[flsmith.com/youtube](https://www.flsmith.com/youtube)